


## ACCESSORY MOTORCYCLE USB CHARGER

### POWERING YOUR ADAPTOR

**NOTE.** We highly recommend installation carried out by a qualified mechanic or technician


#### DIRECT TO BATTERY

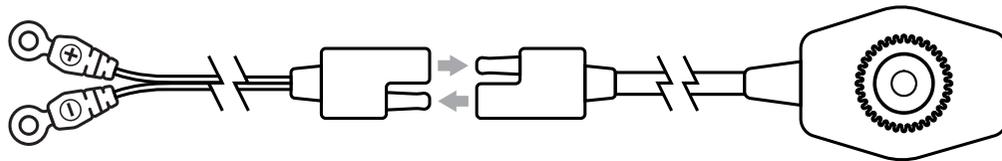

**INPUT - BATTERY**  
12-24V DC/2.5A

**OUTPUT - USB-A**  
3.6V-6.5V/3A, 6.5V-9V/2A, 9V-12V/1.5A

#### TO SAE PORT

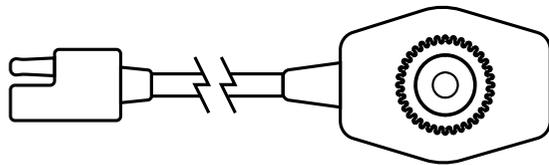

**INPUT - SAE**  
12-24V DC/2.5A

**OUTPUT - USB-A**  
3.6V-6.5V/3A, 6.5V-9V/2A, 9V-12V/1.5A


### DUST AND WATER

We recommend you mount your charger with USB port facing down, to allow water and dirt to drain.

Whilst the USB charger is IP66 rated against dust and water ingress, taking this simple step while mounting the charger will increase its lifespan and your overall user experience.

### MOUNTING OPTIONS

The diagram below shows the installation options for optimal performance from your vibration dampener

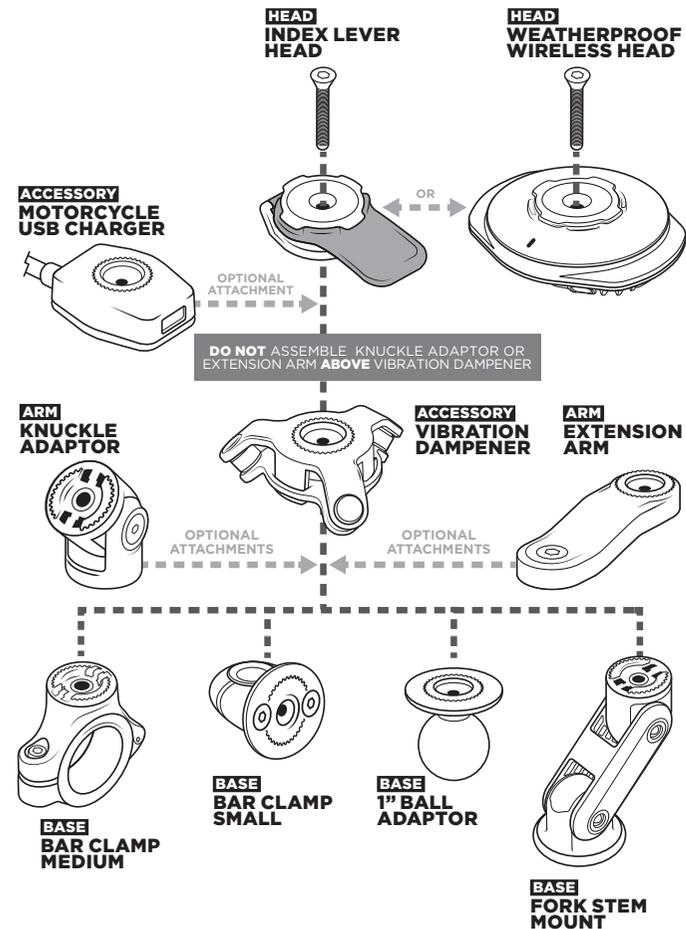

**DO NOT ASSEMBLE KNUCKLE ADAPTOR OR EXTENSION ARM ABOVE VIBRATION DAMPENER**

RACCOLTA DIFFERENZIATA. VERIFICA LE DISPOSIZIONI DEL TUO COMUNE. SVUOTARE L'IMBALLAGGIO.

